

MA90



Reliable, stable, high quality machining with extended tool life

Unique tangential 90° End mill design provides a large variety of machining operations

Newly designed inserts with grade PR18 series coating technology

High quality surface finish and excellent wall accuracy

**Supports multi-functional machining
such as 3D milling**



Tangential 90° End mill with 4-Edge inserts

MA90

Original tangential 90° End mill with economical 4-edge inserts. New grade PR18 Series and unique insert cutting edge design creates high-quality machining with longer tool life

1 The MA90 provides a large variety of machining operations

Challenges

Conventional End mill

- Sudden fractures can cause damage to the holder
- Insert defects preventing use of all four corners

Tangential End mill

- Premature tool wear can quickly deteriorate the surface finish quality
- Poor wall accuracy

SOLUTION

Kyocera's MA90 tangential End mill solves these problems with a unique insert shape and PR18 Series grade technology.

Large web thickness

High rigidity

Peripheral grinding specifications

Excellent wall accuracy

Special wiper edge

Large relief angle suppresses wear
High-quality surface finish





Multifunctional (G-class insert)

Supports three-dimensional machining

Unique cutting edge design

Excellent fracture resistance and low cutting force design

Newly developed insert grade

MEGACOAT NANO EX

PR18 Series delivers longer tool life

2

New insert grade PR18 series provides a significantly longer tool life

Next-generation insert grade for milling

NEW

PR18 Series

Kyocera's nano layer coating technology

Longer tool life with next-generation coating for milling



Double lamination technology maintains longer tool life

Multi-layer structure with two unique nano layers
Superior abrasion resistance and fracture resistance

Special nano layer x Multilayer lamination

Nano-Layer

AlCr-based coating
with excellent abrasion resistance

High toughness
suppresses crack growth

Nano-Layer

AlTi-based coating
with excellent heat resistance

High toughness
suppresses crack growth

Multi-layering of high-performance nano layers
Increases toughness with suppression of crack growth and optimization of internal stress

CG Image


Extensive lineup of insert grades covers a variety of machining materials and applications

Workpiece material	P Steel					M Stainless steel					K Cast iron				
	01	10	20	30	40	01	10	20	30	40	01	10	20	30	40
Lineup	1st recommendation PR1825					1st recommendation PR1835					1st recommendation PR1810				
	Wet PR1835					High-speed machining CA6535									
H Hardened material	PR015S (GH)					S Heat-resistant alloy					Titanium alloy PR1835				
						CA6535 (PR1835)									


PR1825 Wear resistance comparison (Internal evaluation)
V-T graph

Life criteria:
Flank face wear = 0.10 mm

Cutting conditions:
Vc = **160 / 300** m/min
ap × ae = 2.0 × 110 mm, fz = 0.12 mm/t
SCM440 Dry
PNMU1205ANER-GM (MFPN)

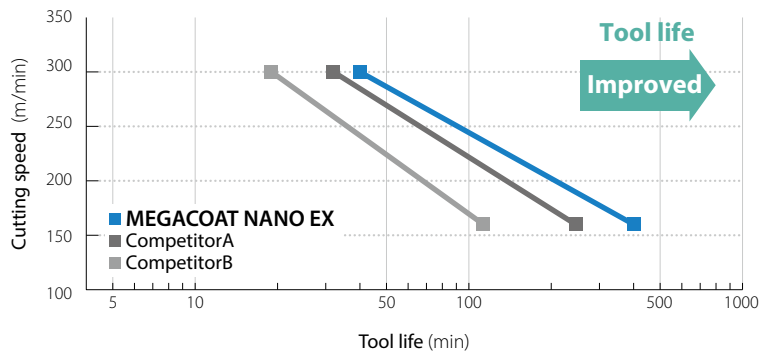


Coating characteristics (Internal evaluation)

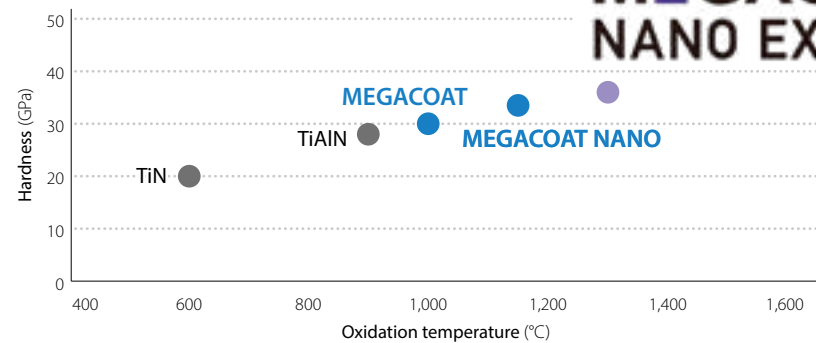

Oxidation progression comparison (Internal evaluation)


Suppresses oxidation progression with excellent oxidation resistance

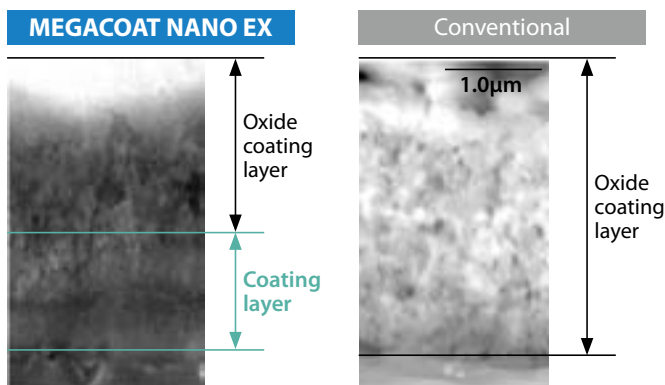

*Section after holding at 1,200 degrees for 30 minutes in air

Coating layer toughness evaluation (Internal evaluation)

Excellent coating toughness with small crack length

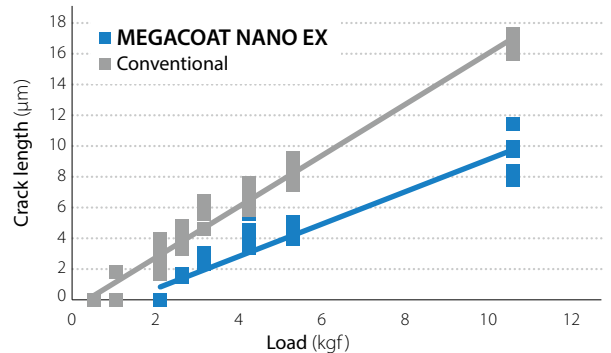

*Micro-Vickers measurement

3

Reliable results with an insert shape designed for high quality machining and long tool life

Unique cutting edge design delivers high fracture resistance and low cutting forces

Special wiper edge and peripheral grinding specifications provide high quality finish and long tool life



Advantage

Both the A.R. and the relief angle of the wiper edge are large.
Low resistance and excellent surface finish



Unique cutting edge design

Superior fracture resistance and low cutting force

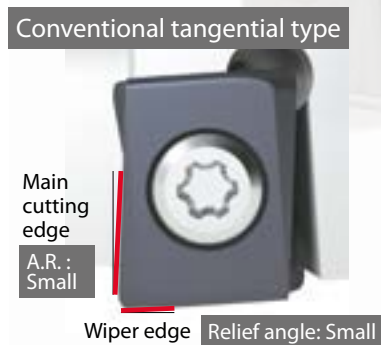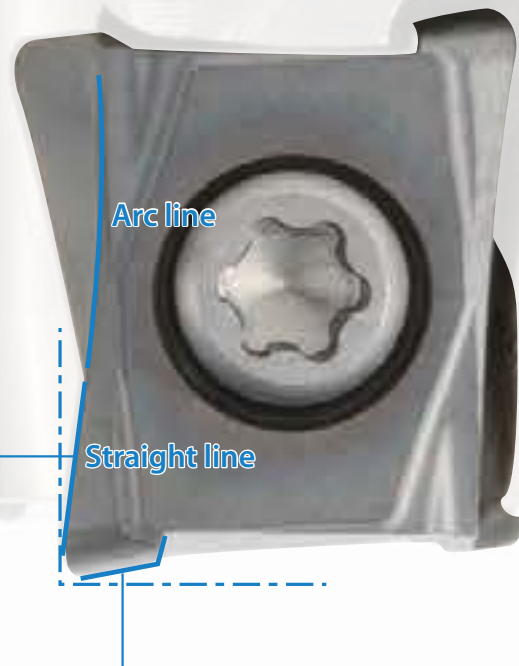

Special wiper edge


Large relief angle: Excellent surface finish and wear suppression
Stepped corners: Designed to prevent seat damage

Excellence surface finish


Special wiper edge design suppresses abrasion progress of the edge. Maintains high-quality finished surface

Wear and surface finish comparison (Internal evaluation)

Wiper edge wear

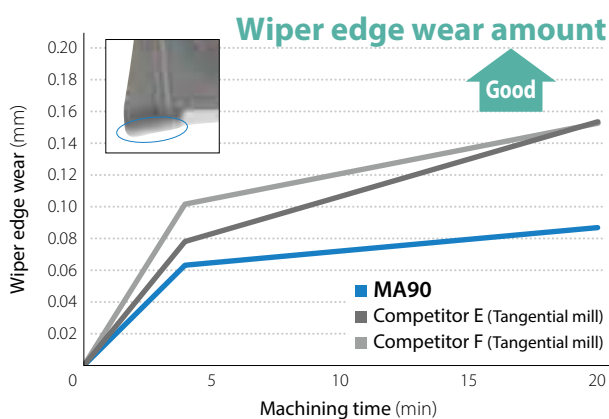

Surface finish roughness (Bottom surface)

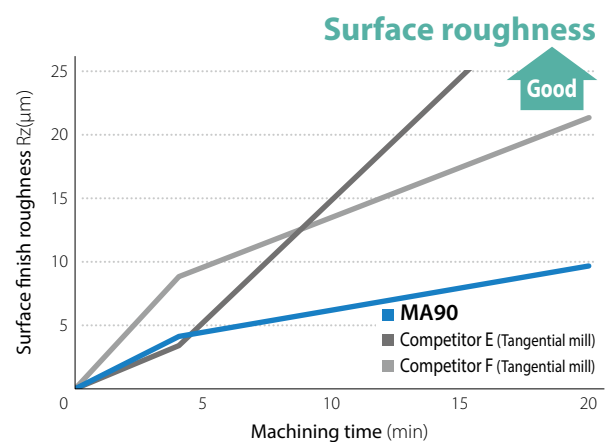

Cutting conditions: Vc = 200 m/min, ap x ae = 1 x 37.5 mm, fz = 0.1/0.12 mm/t, Dry S50C ø50 (6/7 inserts) BT50


>>> Excellent wall accuracy

Peripheral grinding specifications

Unique, sloped, edge shape
Grounded peripheral provides higher precision



Wall accuracy comparison (Internal evaluation)

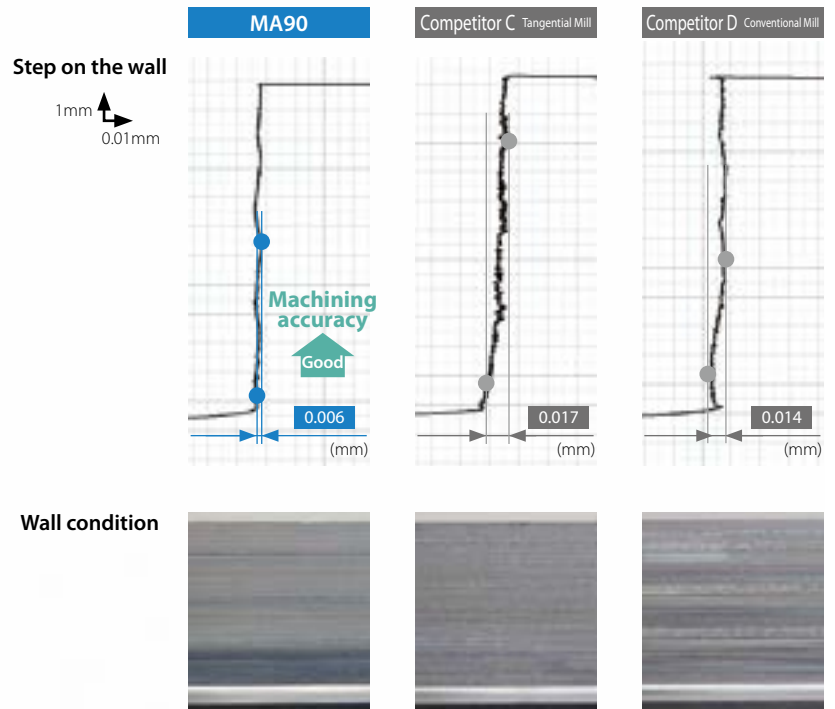

Cutting conditions: $V_c = 150$ m/min, $a_p \times a_e = 3 \times 5$ mm 4 passes, $f_z = 0.1$ mm/t, Dry S50C Dia.20 (3 inserts) BT50

>>> Long tool life and high-speed machining

Test 1

Even if the main cutting edge is in good condition, the tool reached the end of life due to deterioration of the finished surface.




Test 2

Machined with reduced cutting speed because the surface finish deteriorated early.



Edge condition and finished surface

		MA90	Competitor E Tangential	Competitor F Tangential
Wiper edge	After 3.8 min			
	After 6.5 min			
Main cutting edge		Good	Good	Good
Finished surface	After 13.1 min	Good	Cloudy finish	Surface finish deteriorating
		8.0 μ mRz (1.3 μ mRa)	20.6 μ mRz (2.2 μ mRa)	14.9 μ mRz (3.0 μ mRa)
Results		Main cutting edge: Good Wiper edge wear: Small wear Good finished surface and can continue to use	Main cutting edge: Good Wiper edge wear: Progressive Worse finished surface	Main cutting edge: Good Wiper edge wear: Progressive Worse finished surface

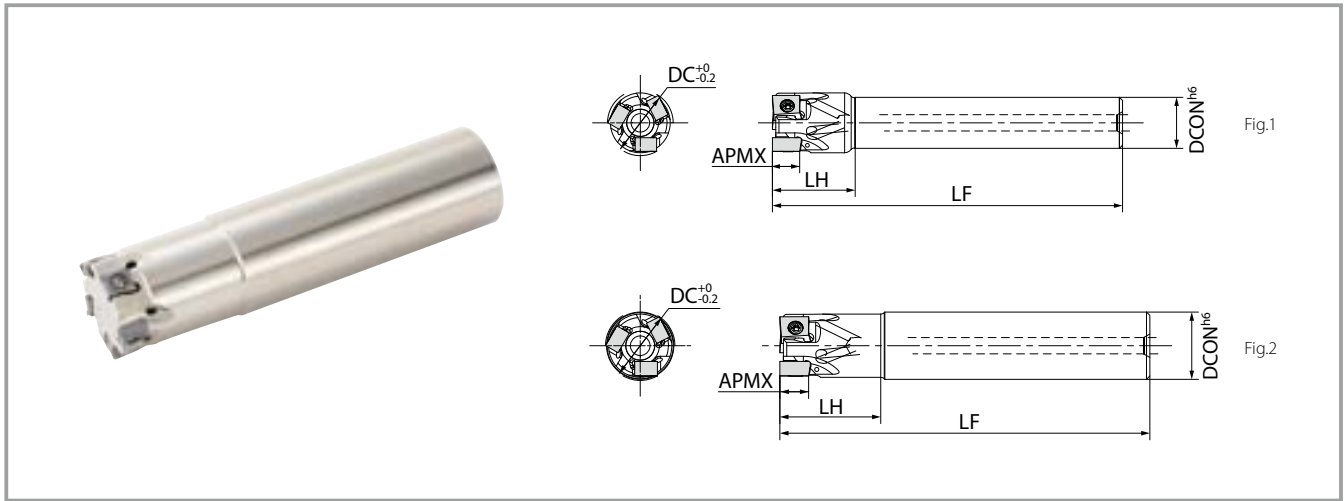

Toolholder dimensions 09 size (LOGU09 ...)

Description	Availability	Number of inserts	Dimensions (mm)					Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)	
			DC	DCON	LF	LH	APMX					
Standard shank	MA90 - 16S12-09T2C	●	2	16	12	100	23	8	Yes	Fig.1	0.1	29,500
				18	16							27,900
	20S16-09T2C	●	3	20	16	110	26				0.2	26,600
	20S16-09T3C	●		22	20							25,400
	22S20-09T3C	●	4	25	20	120	29				0.3	23,900
	25S20-09T3C	●		28	25							22,600
	25S20-09T4C	●	4	30	25	130	32				0.5	21,900
	28S25-09T3C	●		32	32							21,200
	30S25-09T4C	●	5	35	150	50	0.9				20,300	
	32S25-09T4C	●									40	32
	32S25-09T5C	●	5	50	120	40	0.9					
	35S32-09T4C	●									7	32
	35S32-09T5C	●	4	20	150	40	0.3					
	40S32-09T4C	●									3	25
	40S32-09T6C	●	5	32	130	40	0.7					
50S32-09T5C	●	2						20	150	30	0.3	26,600
50S32-09T7C	●		25	25	170	50	0.6					23,900
Long shank	MA90 - 20S18-09T2CL	●						2	18	18	150	30
			20	20	40	0.6	23,900					
	25S25-09T2CL	●	32	32			200	65	1.1	21,200		
	32S32-09T2CL	●			2	20				150	30	0.3
20S20-09T2CL	●	25	25	170			50	0.6	23,900			
25S25-09T2CL	●				32	32			200	65	1.1	21,200
32S32-09T2CL	●	2	20	150			30	0.3				26,600
20S20-09T2CL	●				25	25			170	50	0.6	23,900
25S25-09T2CL	●	32	32	200			65	1.1				21,200
32S32-09T2CL	●				2	20			150	30	0.3	26,600
20S20-09T2CL	●	25	25	170			50	0.6				23,900
25S25-09T2CL	●				32	32			200	65	1.1	21,200
32S32-09T2CL	●	2	20	150			30	0.3				26,600
20S20-09T2CL	●				25	25			170	50	0.6	23,900
25S25-09T2CL	●	32	32	200			65	1.1				21,200

Maximum number of revolutions

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 12.

Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

Toolholder dimensions 12 size (LOGU12 ...)

Description	Avail-ability	Number of inserts	Dimensions (mm)					Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)				
			DC	DCON	LF	LH	APMX								
Standard shank	●	2	25	20	120	29	12	Yes	Fig.1	0.3	18,300				
			28	25						130	32	0.4	17,300		
		30	32		150	50						0.5	16,800		
		32		3						35	40			0.9	16,300
		35													
		40	6		50	120						40			
		50											2		
		32	32	130	40	0.7				16,300					
		32									2	25	170	50	12
		32	32	200	65	1.1				16,300					





Maximum number of revolutions

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 12.


Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

Parts / Applicable inserts

Description			Clamp screw	Wrench	Anti-seizure compound	Arbor bolt	
							
09 size (LOGU09...)	End mill Modular	MA90-16...-09...	SB-44865UTRP	DTPM-8	P-37	-	
		MA90-18...-09...	Tightening torque for clamping insert 1.2 N•m			-	
		MA90-20~50...-09...				-	
	Face mill	MA90-040R-09...	SB-44880UTRP	DTPM-8		HH8×25	
		MA90-050R-09...	Tightening torque for clamping insert 1.2 N•m			HH10×30	
		MA90-063R-09...					
12 size (LOGU12...)	End mill Modular	MA90-...-12...			P-37	-	
	Face mill	MA90-040R-12...-M			HH8×25		
		MA90-050R-12...-M			HH10×30		
		MA90-063R-12...-M	SB-40104TRP	DTPM-15	P-37	-	
		MA90-080R-12...-M	Tightening torque for clamping insert 3.5 N/m				HH12×35
		MA90-100R-12...-M					
		MA90-125R-12...-M					

MA90 Face mill

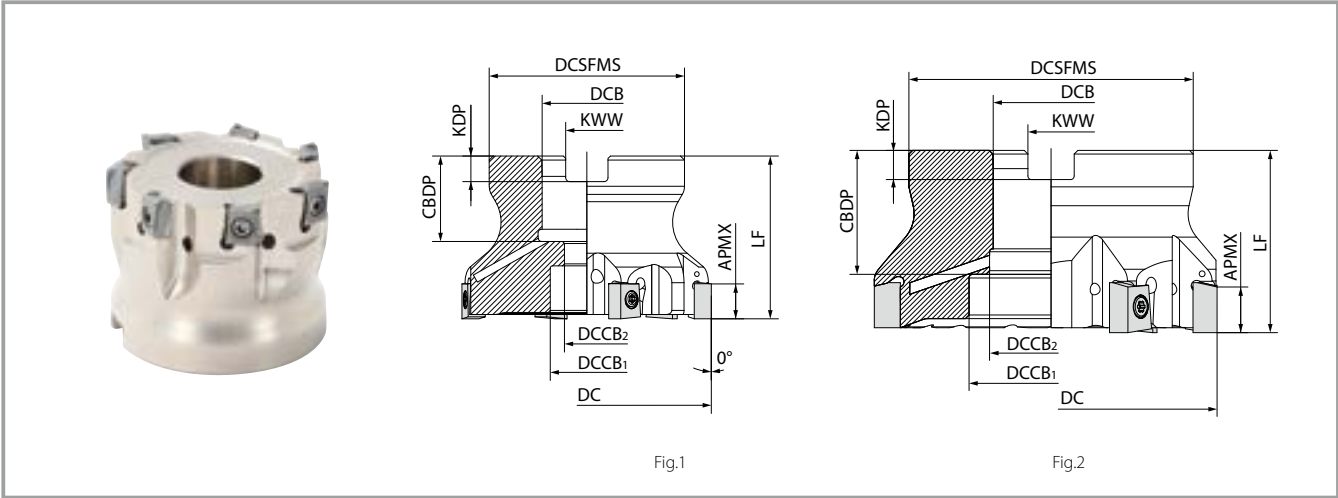

Toolholder dimensions 09 size (LOGU09...)

Description	Avail-ability	Number of inserts	Dimensions (mm)										Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX				
MA90 - 040R-09T4C-M	●	4	40	38	16	15	9	19	5.6	8.4	8	Yes	Fig.1	0.2	26,600	
040R-09T6C-M	●	6														
050R-09T5C-M	●	5	50	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.4	23,900	
050R-09T7C-M	●	7														
063R-09T6C-M	●	6	63	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.5	21,200	
063R-09T9C-M	●	9														

Maximum number of revolutions
 Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 12.
 Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.


● Available

Toolholder dimensions 12 size (LOGU12...)

Description	Avail-ability	Number of inserts	Dimensions (mm)										Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX				
MA90 - 040R-12T3C-M	●	3	40	38	16	14	9	19	5.6	8.4	12	Yes	Fig.1	0.2	14,600	
040R-12T4C-M	●	4														
050R-12T4C-M	●	4	50	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.3	13,100	
050R-12T6C-M	●	6														
063R-12T6C-M	●	6	63	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.4	11,700	
063R-12T8C-M	●	8														
080R-12T7C-M	●	7	80	70	27	20	13	50	24	7	12.4	Yes	Fig.1	1.2	10,400	
080R-12T10C-M	●	10														
100R-12T9C-M	●	9	100	78	32	45	-	50	30	8	14.4	Yes	Fig.2	1.5	9,300	
100R-12T13C-M	●	13														
125R-12T12C-M	●	12	125	89	40	55	-	63	33	9	16.4	Yes	Fig.2	2.5	8,300	
125R-12T16C-M	●	16														

Maximum number of revolutions.
 Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 12.
 Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

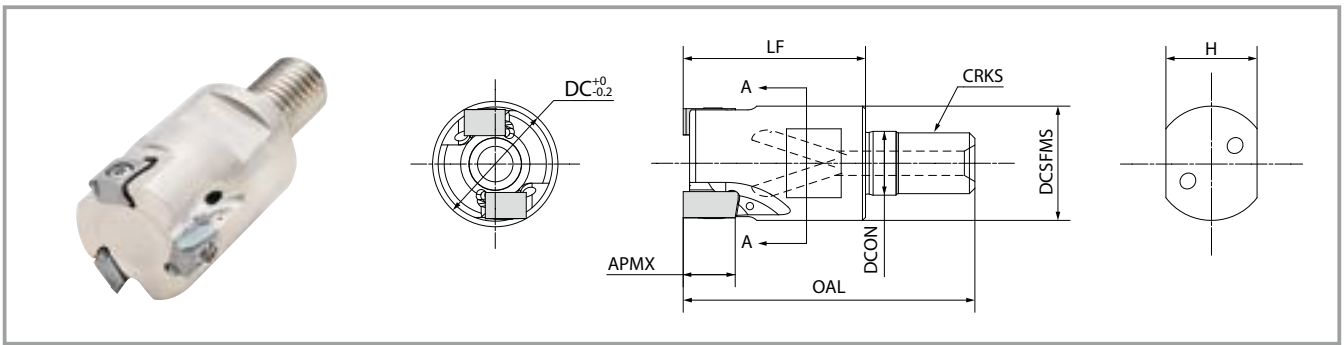

Toolholder dimensions 09 size (LOGU09...)

Description	Availability	Number of inserts	Dimensions (mm)								Coolant hole	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCON	OAL	LF	CRKS	H	APMX		
MA90 - 20M10-09T2C	●	2	20	18.8	10.5	48	30	M10×P1.5	15	8	Yes	19,000
20M10-09T3C	●	3										
25M12-09T3C	●	4	25	23	12.5	56	35	M12×P1.75	19			
25M12-09T4C	●											
32M16-09T4C	●	5	32	30	17	62	40	M16×P2.0	24			
32M16-09T5C	●											

● Available

Toolholder dimensions 12 size (LOGU12...)

Description	Availability	Number of inserts	Dimensions (mm)								Coolant hole	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCON	OAL	LF	CRKS	H	APMX		
MA90 - 25M12-12T2C	●	2	25	23	12.5	56	35	M12×P1.75	19	12	Yes	18,300
32M16-12T2C	●		32	30	17	62	40	M16×P2.0	24			16,300
32M16-12T3C	●	3										


● Available

Maximum number of revolutions

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 12.

Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

BT arbor for modular type (for exchangeable head/two face contact)

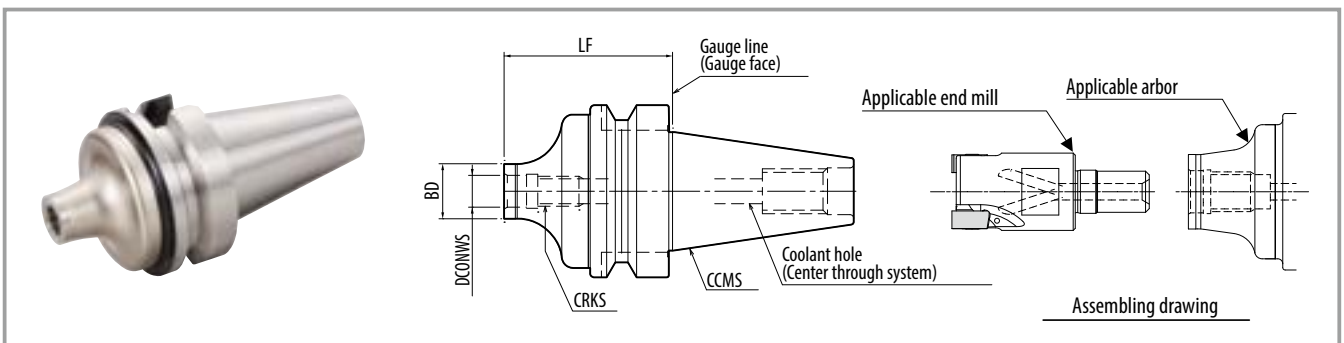


Dimensions

Description	Availability	Dimensions (mm)					Coolant hole	Arbor (Two-face clamping)		Applicable end mill (Head)
		LF	BD	DCONWS	CRKS	CCMS				
BT30K- M10-45	●	45	18.7	10.5	M10×P1.5	Yes	BT30	MA90-...M10-...		
M12-45	●	45	23	12.5	M12×P1.75			MA90-...M12-...		
BT40K- M10-60	●	60	18.7	10.5	M10×P1.5	Yes	BT40	MA90-...M10-...		
M12-55	●	55	23	12.5	M12×P1.75			MA90-...M12-...		
M16-65	●	65	30	17	M16×P2.0			MA90-...M16-...		





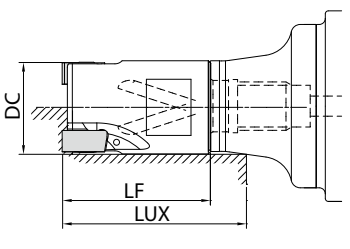

● Available

BT Arbor for modular type (for exchangeable head/two face contact)

Actual end mill depth

	Arbor description		Applicable end mill (Head)		Actual end mill depth(mm)
			Description	Cutting dia. (mm)	Dimensions (mm)
		DC		LF	
BT30K-	M10-45	MA90-20M10-...	20	30	36.8
	M12-45	MA90-25M12-...	25	35	42.8
BT40K-	M10-60	MA90-20M10-...	20	30	38.7
	M12-55	MA90-25M12-...	25	35	44.6
	M16-65	MA90-32M16-...	32	40	51.2

Applicable Inserts (G-class)

Shape	Description	Dimensions (mm)						MEGACOAT (PVD coating)				CVD Coating				
		W1	S	D1	INSL	BS	RE	PR1825	PR1835	PR1810	PR0155	CA6535				
 General purpose	LOGU 090404ER-GM	4.3	6.77	3.33	8.89	1.29	0.4	●	●	●	-	●				
	090408ER-GM		6.71			0.90	0.8	●	●	●	-	●				
	090412ER-GM		6.65			0.49	1.2	●	●	●	-	●				
	090416ER-GM		6.59			0.10	1.6	●	●	●	-	●				
 Low cutting force	LOGU 090404ER-SM	4.3	6.77	3.33	8.89	1.29	0.4	●	●	-	-	●				
	090408ER-SM		6.71			0.89	0.8	●	●	-	-	●				
	090412ER-SM		6.65			0.49	1.2	●	●	-	-	●				
	090416ER-SM		6.59			0.10	1.6	●	●	-	-	●				
 Tough edge	LOGU 090408ER-GH	4.3	6.71	3.33	8.89	0.90	0.8	●	●	●	●	-				
 General purpose	LOGU 120604ER-GM	6.6	10.10	4.55	13.28	2.50	0.4	●	●	●	-	●				
	120608ER-GM		10.04			13.28	2.14	0.8	●	●	●	-	●			
	120612ER-GM		9.97			13.28	1.79	1.2	●	●	●	-	●			
	120616ER-GM		9.92			13.28	1.44	1.6	●	●	●	-	●			
	120620ER-GM		9.85			13.28	1.08	2.0	●	●	●	-	●			
	120624ER-GM		9.79			13.28	0.72	2.4	●	●	●	-	●			
	120630ER-GM		9.69			13.28	0.20	3.0	●	●	●	-	●			
	LOGU 120604ER-SM		10.10			13.28	2.50	0.4	●	●	-	-	●			
 Low cutting force	LOGU 120608ER-SM	6.6	10.04	4.55	13.28	2.14	0.8	●	●	-	-	●				
	120612ER-SM		9.97			13.28	1.79	1.2	●	●	-	-	●			
	120616ER-SM		9.92			13.28	1.44	1.6	●	●	-	-	●			
	120620ER-SM		9.85			13.28	1.08	2.0	●	●	-	-	●			
	120624ER-SM		9.79			13.28	0.72	2.4	●	●	-	-	●			
	120630ER-SM		9.69			13.28	0.20	3.0	●	●	-	-	●			
	 Tough edge		LOGU 120608ER-GH			6.6	10.16	4.55	13.25	2.26	0.8	●	●	●	●	-


●: Available

Recommended cutting conditions ★1st recommendation ☆2nd recommendation

Type	Workpiece material	Toolholder description and feed rate (fz: mm/t)				Recommended insert grade (Vc: m/min)				
		09 size (LOGU09...)		12 size (LOGU12...)		MEGACOAT NANO EX			MEGACOAT HARD	CVD coating
		MA90-16~ MA90-18	MA90-20~MA90-50 MA90-040~MA90-063	MA90-25~ MA90-30	MA90-32~MA90-50 MA90-040~MA90-125	PR1825	PR1835	PR1810	PR015S	CA6535
General purpose GM	Carbon steel	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.16	0.05 – 0.1 – 0.18	0.06 – 0.15 – 0.23	★ 120 – 180 – 250	☆ 120 – 180 – 250	–	–	–
	Alloy steel	0.05 – 0.08 – 0.12	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.16	0.06 – 0.13 – 0.2	★ 100 – 160 – 220	☆ 100 – 160 – 220	–	–	–
	Mold steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	★ 80 – 140 – 180	☆ 80 – 140 – 180	–	–	–
	Austenitic stainless steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	☆ 100 – 160 – 200	★ 100 – 160 – 200	–	–	–
	Martensitic stainless steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	–	☆ 150 – 200 – 250	–	–	★ 180 – 240 – 300
	Precipitation hardened stainless steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	–	★ 90 – 120 – 150	–	–	–
	Grey cast iron	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.16	0.05 – 0.1 – 0.18	0.06 – 0.15 – 0.23	–	–	☆ 120 – 180 – 250	–	–
	Ductile cast iron	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	–	–	☆ 100 – 150 – 200	–	–
	Ni-based heat resistant alloys	0.05 – 0.06 – 0.08	0.05 – 0.08 – 0.1	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.15	–	–	–	–	★ 20 – 30 – 50
	Titanium alloy (Ti-6Al-4V)	0.05 – 0.08 – 0.1	0.05 – 0.09 – 0.12	0.05 – 0.09 – 0.12	0.06 – 0.1 – 0.15	–	☆ 30 – 50 – 70	–	–	–
Low cutting force SM	Carbon steel	0.05 – 0.08 – 0.11	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.14	0.06 – 0.1 – 0.18	★ 120 – 180 – 250	☆ 120 – 180 – 250	–	–	–
	Alloy steel	0.05 – 0.07 – 0.1	0.05 – 0.08 – 0.12	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.14	★ 100 – 160 – 220	☆ 100 – 160 – 220	–	–	–
	Mold steel	0.05 – 0.07 – 0.1	0.05 – 0.08 – 0.1	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.14	★ 80 – 140 – 180	☆ 80 – 140 – 180	–	–	–
	Austenitic stainless steel	0.05 – 0.08 – 0.11	0.05 – 0.08 – 0.12	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.14	☆ 100 – 160 – 200	★ 100 – 160 – 200	–	–	–
	Martensitic stainless steel	0.05 – 0.08 – 0.11	0.05 – 0.08 – 0.12	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.14	–	☆ 150 – 200 – 250	–	–	★ 180 – 240 – 300
	Precipitation hardened stainless steel	0.05 – 0.08 – 0.11	0.05 – 0.08 – 0.12	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.14	–	★ 90 – 120 – 150	–	–	–
	Ni-based heat resistant alloys	0.05 – 0.06 – 0.08	0.05 – 0.08 – 0.1	0.05 – 0.08 – 0.1	0.06 – 0.08 – 0.12	–	–	–	–	★ 20 – 30 – 50
	Titanium alloy (Ti-6Al-4V)	0.05 – 0.08 – 0.1	0.05 – 0.08 – 0.12	0.05 – 0.08 – 0.12	0.06 – 0.09 – 0.12	–	★ 30 – 50 – 70	–	–	–
Tough edge GH	Carbon steel	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.16	0.05 – 0.1 – 0.18	0.06 – 0.15 – 0.23	★ 120 – 180 – 250	☆ 120 – 180 – 250	–	–	–
	Alloy steel	0.05 – 0.08 – 0.12	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.16	0.06 – 0.13 – 0.2	★ 100 – 160 – 220	☆ 100 – 160 – 220	–	–	–
	Mold steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	★ 80 – 140 – 180	☆ 80 – 140 – 180	–	–	–
	Austenitic stainless steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	☆ 100 – 160 – 200	☆ 100 – 160 – 200	–	–	–
	Martensitic stainless steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	–	☆ 150 – 200 – 250	–	–	–
	Precipitation hardened stainless steel	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	–	☆ 90 – 120 – 150	–	–	–
	Grey cast iron	0.05 – 0.1 – 0.14	0.05 – 0.1 – 0.16	0.05 – 0.1 – 0.18	0.06 – 0.15 – 0.23	–	–	★ 120 – 180 – 250	–	–
	Ductile cast iron	0.05 – 0.08 – 0.1	0.05 – 0.1 – 0.12	0.05 – 0.1 – 0.14	0.06 – 0.12 – 0.18	–	–	★ 100 – 150 – 200	–	–
	Ni-based heat resistant alloys	0.05 – 0.06 – 0.08	0.05 – 0.08 – 0.1	0.05 – 0.08 – 0.12	0.06 – 0.1 – 0.15	–	–	–	–	–
	Titanium alloy (Ti-6Al-4V)	0.05 – 0.08 – 0.1	0.05 – 0.09 – 0.12	0.05 – 0.09 – 0.12	0.06 – 0.1 – 0.15	–	☆ 30 – 50 – 70	–	–	–

The number in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation. Machining with coolant is recommended for Ni-base heat-resistant alloys and titanium alloys. When choosing wet machining for other workpieces, reduce the cutting speed to 70% or less. Face milling does not recommend slotting or pocketing. We recommend setting the ae to 75% or less. We recommend the small number insert type for ae of 30% or more. Working above recommended conditions or long-term use can damage the screws. It is recommended to replace the screws regularly.


Cutting performance



09 size (LOGU09...) Steel machining (dry)


Cutting dia. DC: $\phi 16 \sim \phi 18$

ae/DC

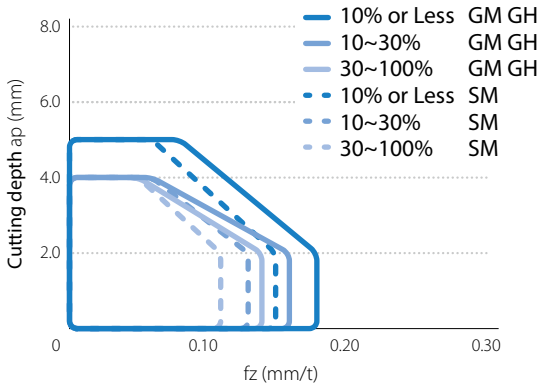

Cutting dia. DC: $\phi 20 \sim \phi 63$

ae/DC

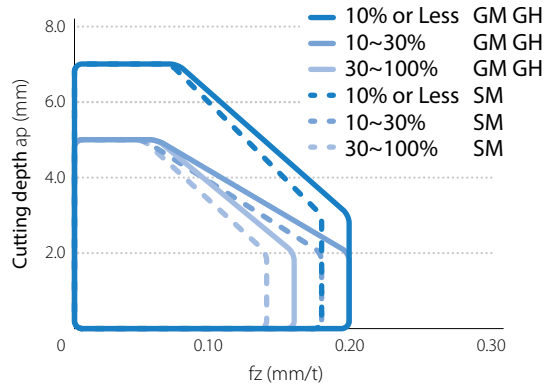


For other workpiece material, set ap and fz appropriately for each ae.

12 size (LOGU12...) Steel machining (dry)


Cutting dia. DC: $\phi 25 \sim \phi 30$

ae/DC

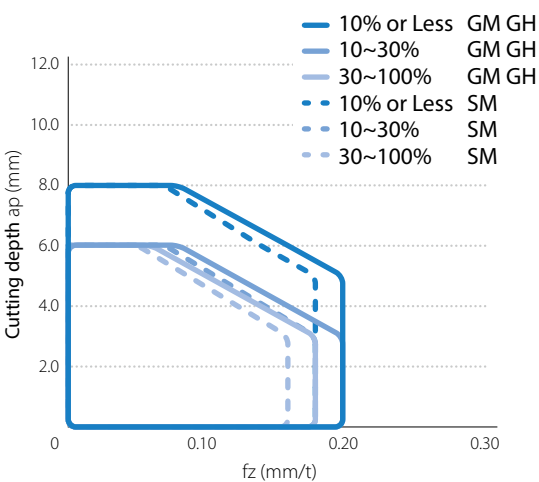

Cutting dia. DC: $\phi 32 \sim \phi 125$

ae/DC

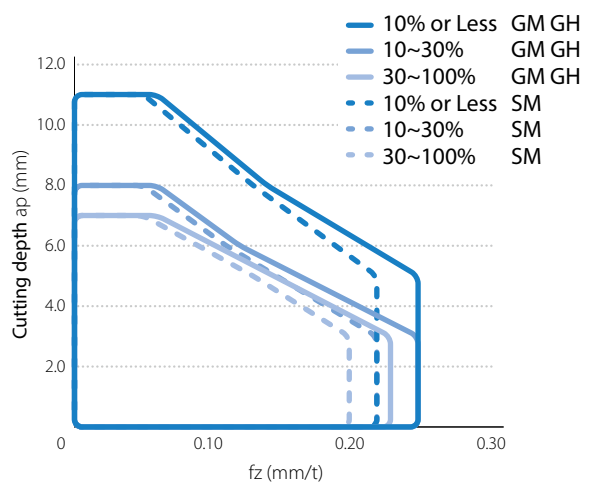

For other workpiece material, set ap and fz appropriately for each ae.

Case Studies

Brake parts FCD500

Vc = 135 m/min
 n = 535 min⁻¹
 ap x ae = 3.4 x 25 mm
 fz = 0.15 mm/t
 Vf = 560 mm/min
 Wet
 MA90-080R-12T7C-M
 LOGU120616ER-GM (PR1810)



Number of Workpieces

MA90
(7 inserts)

1,000 pcs

Tool life

x1.6

Competitor G
(7 inserts)


600 pcs

MA90 showed good cutting edge condition and stable machining. Achieved 1.6 times longer tool life.

(User evaluation)

Mold parts Stainless steel

Vc = 125 m/min
 n = 1,600 min⁻¹
 ap x ae = 1.0 x 25 mm
 fz = 0.12 mm/t
 Vf = 570 mm/min
 Dry
 MA90-25S20-09T3C
 LOGU090408ER-GM (PR1835)



Machining efficiency

MA90
(3 inserts)

Q = 14.5 cc/min

x1.5

Machining efficiency

Competitor H
(3 inserts)


Q = 9.5 cc/min

MA90 showed 1.5 times higher machining efficiency than its competitors. Improved tool life (3 to 4 pcs)

(User evaluation)

Notes

Applications

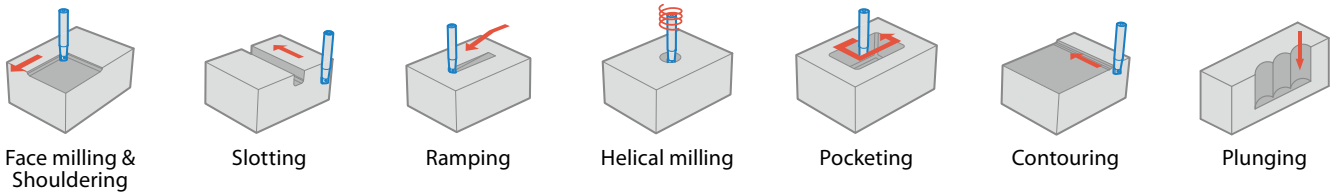

Ramping reference table

Description	Cutter diameter DC (mm)	16	20	25	32	40	50
MA... - 09 - ...	Max. ramping angle RMPX	1.16°	0.97°	0.64°	0.4°	0.23°	0.11°
	tan RMPX	0.020	0.017	0.011	0.007	0.004	0.002
Description	Cutter diameter DC (mm)	25	28	30	32	35	40
MA... - 12 - ...	Max. ramping angle RMPX	2°	1.7°	1.6°	1.5°	1.2°	1°
	tan RMPX	0.034	0.030	0.027	0.026	0.021	0.017


Decrease the angle of inclination when the chips extend longer.

Ramping tips

Ramping angle should be under RMPX.
Reduce recommended feed rate by 70%

Formula for min. cutting length (L) at max. ramping angle

$$L = \frac{ap}{\tan RMPX}$$

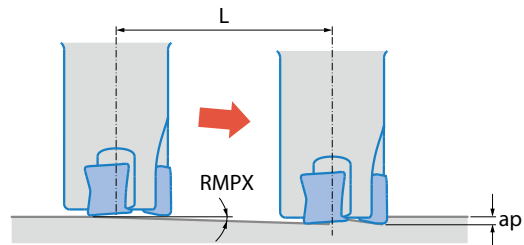


Helical milling tips

For helical milling, use between min. cutting dia. and max. cutting dia.


Exceeding max. cutting dia.

Center core remains after machining



Less than min. cutting dia.

Center core hits holder body

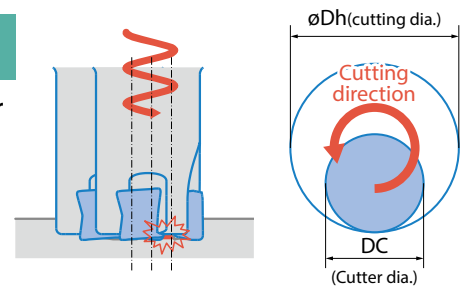


Units: mm

Description	Min. cutting dia. øDh1	Maxi. cutting dia. øDh2
MA... - 09 - ...	2×DC-4	2×DC-2
MA... - 12 - ...	2×DC-6	2×DC-2

For helical milling, use between min. cutting dia. and max. cutting dia..
The cutter direction should be counterclockwise (down cut) (see above).
Please machining in a safe environment as long chips may be produced.

Pecking tips

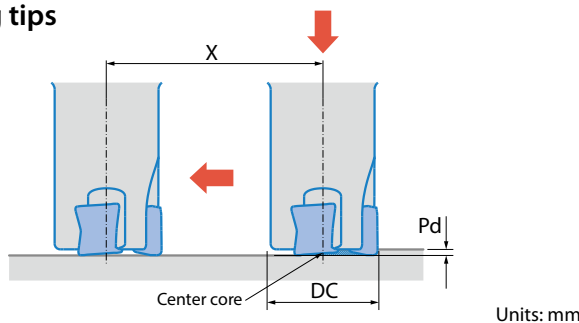


Units: mm

Description	Max. drilling depth Pd	Min. cutting length X for flat bottom surface
MA... - 09 - ...	0.25	DC-3
MA... - 12 - ...	0.5	DC-5

It is recommended to reduce feed by 25% of recommendation until the center core is removed when traversing after drilling.

Axial feed rate recommendation per revolution is $f = 0.1\text{mm/rev}$ or less when drilling.

Plunging tips



Available for vertical milling (plunging)
Feed should be set within $fz = 0.1$ (mm/t) when plunging.

Units: mm

Description	Maximum width of cut (ae)
09 size (LOGU09...)	2
12 size (LOGU12...)	3



Tangential Cutter

***Safe. Rigid.
Quality Machining***